
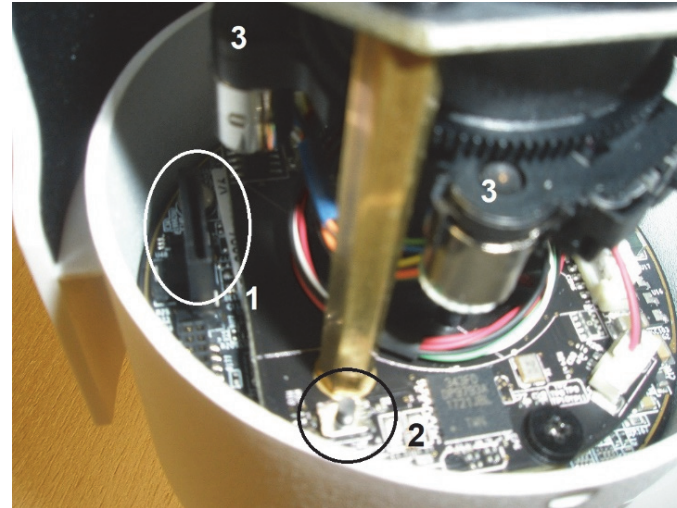


This guide is for quick installing and connecting the 4 MP HDR Micro Bullet IP Camera. For more details, please refer to the User's Manual.

microSD Card Slot / Default Button

Loosen first the tube screw and then pull the tube away from housing.

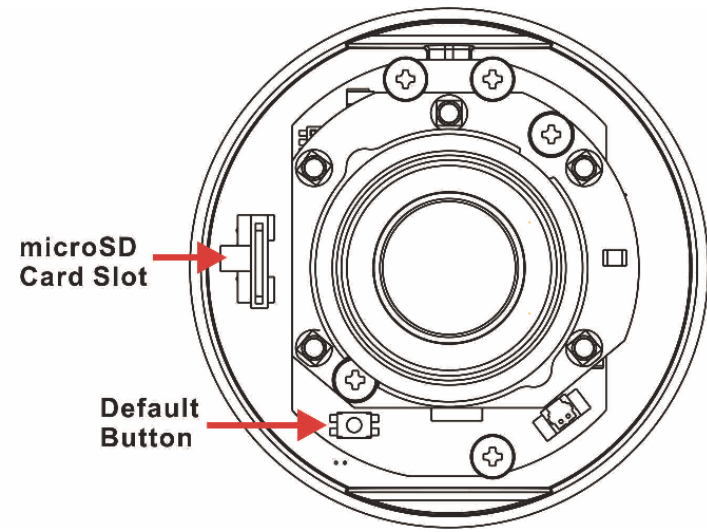

Motorized Lens (3)

microSD Card Slot (1)

Insert the microSD card into the card slot to store videos and snapshots. Do not remove the microSD card when the camera is powered on.



NOTE: It is not recommended to record with the microSD card for 24/7 continuously, as it may not be able to support long-term continuous data read/write. Please contact the manufacturer of the microSD card for information regarding the reliability and the life expectancy.

Default Button (2)

Press the button with a proper tool for at least 20 seconds to restore the system.

Function Cable



No.	Connector	Definition
1	RJ-45	For network and PoE connections

Camera Cabling


Please follow the instructions below for cable connections.

Power & Network Connection

Connect the RJ-45 connector of the camera to a PoE switch. The camera will automatically power up and connect to the Ethernet.



NOTE: Check the status of the link indicator and the activity indicator LEDs. If the LEDs are unlit, please check the LAN connection.



Green Link Light indicates good network connection.
Orange Activity Light flashes for network activity indication.

Before Login to the Camera

A client program will be automatically installed to the PC when connecting to the camera. Before logging in to the camera, ensure downloading the ActiveX control is allowed by either changing the ActiveX controls and plug-ins or setting Internet's security level to default. For further details, please refer to the User's Manual.

ActiveX Controls and Plug-ins Settings	Internet Security Level
Step 1: Start the Internet Explorer (IE). Step 2: Select <Tools> from the main menu of the browser. Then click on <Internet Options>. Step 3: Click on the <Security> tab and select <Internet>, and click on <Custom level> to change ActiveX settings. Step 4: Set "ActiveX controls and plug-ins" items to <Prompt> or <Enable>.	Step 1: Start the Internet Explorer (IE). Step 2: Select <Tools> from the main menu of the browser. Then click on <Internet Options>. Step 3: Click on the <Security> tab and select <Internet>. Step 4: Down the page, click <Default Level> and click on <OK> to confirm the setting. Close the browser window, and open a new one later for accessing the IP camera.

Camera Login

The default setting of the camera is **DHCP**. You can find the camera via the **Device Searching Tool**, which is on the CD. If no DHCP server is in network, the camera sets itself to IP address **192.168.0.250**. If you now want to access to the camera, please set the IP address of the PC as 192.168.0.XXX; for example:

IP Address: 192.168.0.100

Subnet Mask: 255.255.255.0

Login ID and Password

- Key in the camera's IP address in the URL bar of the web browser window and hit on "Enter".
- Enter the default username (**root**) and password (**admin**) in the prompt request dialogue. Note that username is case sensitive.

Install the ActiveX Control

- After connecting to the camera, the request for installing the ActiveX control will appear just below the URL bar.
- Right click on the information bar, and then click on <Install ActiveX Control...> to permit ActiveX control installation.
- In the pop-up security warning window, click on <Install> to start downloading DCViewer software on the PC.
- Click on <Finish> after DCViewer installation is completed.



Browser-based Viewer

The main page of the IP camera user interface is shown here. Please note that function buttons will vary depending on the camera model.



Note: For details about configuring the camera in GEUTEBRÜCK-Software (**G-Set** and **GSC-Setup**), please refer to the Quick Guides, which can be found at the supplied CDRom.

G-Cam/EWPC-3285

4 MP HDR Micro Bullet
IP Camera
Quick Guide

Ver. 1.0