

In-ceiling mount G-Cam/EBFC-005 (5.04736)

Mini rugged dome IP camera can be mounted with the optional accessory In-ceiling mount. The items and tools needed for in-ceiling installation are listed as follows.



In-ceiling mount package content:

- In-ceiling mount (U-shaped bracket + T-bar bracket)
- Ceiling sticker
- M3 x 6 mm mechanical screw x2
- Trim ring

Items needed:

- Mini rugged dome IP camera
- Ethernet cable
- Power cable (necessary if PoE is not available)
- Alarm cable (optional)
- Audio cable (optional)

Tools needed:


- Tools for cutting
- (+,-) Screwdriver
- Security Torx (supplied)



Follow the steps below to install In-ceiling mount.

Step 1:

Loosen the two security screws indicated in the right figure with the supplied security torx and open the dome cover.

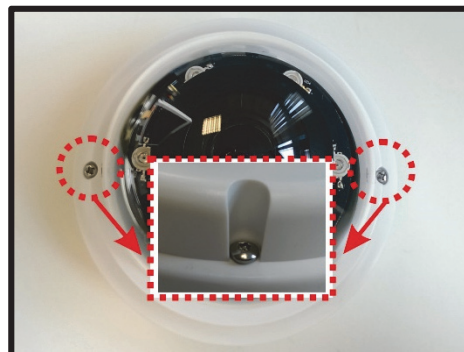**Step 2:**

The dome cover is attached to the camera housing with an anti-drop cable. Loosen the screw indicated in the right figure to detach the dome cover from the camera housing if necessary.

**Step 3:**

Choose a suitable conduit entry on the camera for cable connection (side conduit entry or back conduit entry). If users are using the back conduit entry for cable connection, please use a coin to open the conduit entry block (shown in the right figure) and place it to the side conduit entry.




You also can use the attached cable gland, as shown here, or an armoured conduit with $\frac{3}{4}$ " diameter.





Step 4:

Align the two marked screw holes on the camera to the U-shaped bracket.

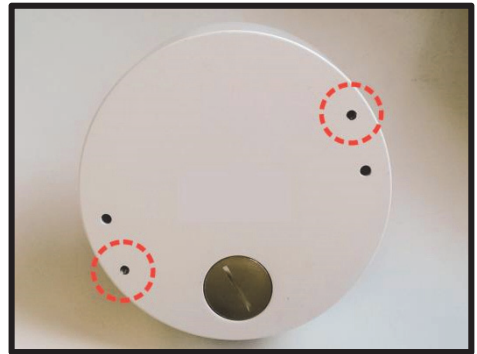**Step 5:**

Fasten the two supplied M3 x 6 mm mechanical screws at the position shown in the right figure to fix the camera to the U-shaped bracket.

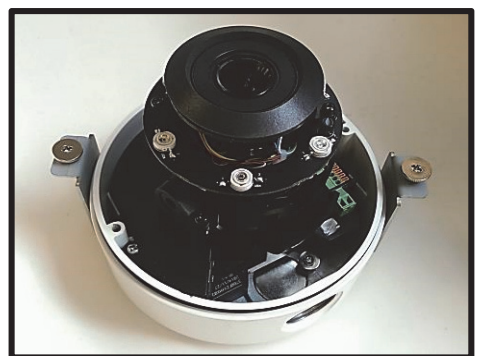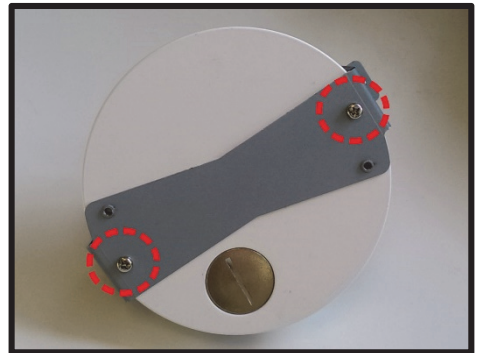


Step 6:


Place the ceiling sticker on the ceiling board, and cut the circle part out of the ceiling.

**Step 7:**


Put up the T-bar bracket into the ceiling opening and fix it on the ceiling board by tightening the two screws indicated in the figure clockwise.

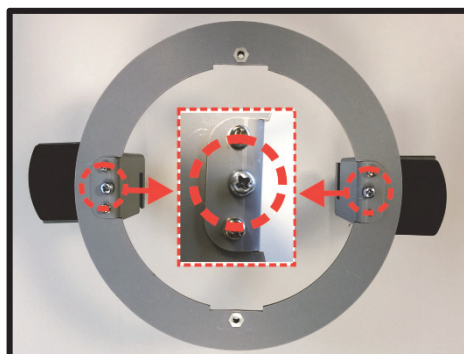**Step 8:**

When tightening the screws, the wings will get approached to the ceiling board. Please make sure it is completely flush with the ceiling board.

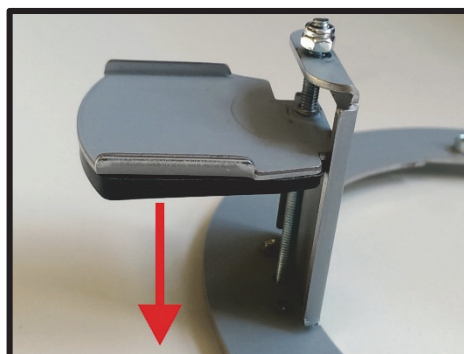
**Step 9:**

Align the U-shaped bracket attached to the camera to the T-bar bracket on the ceiling board.

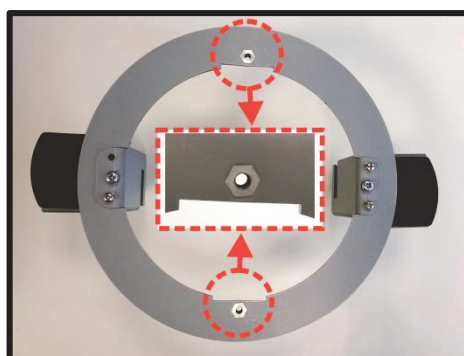

Step 10:

Put the camera into the ceiling opening, and fix the U-shaped bracket on the T-bar bracket by tightening the two screws shown in the figure.

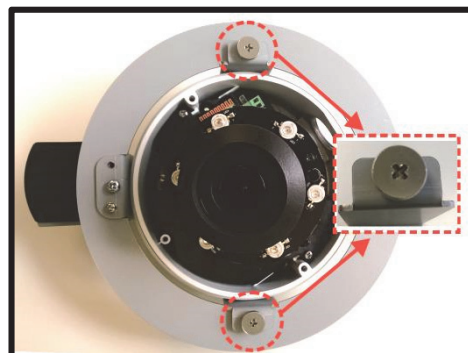**Step 11:**

Put the Ethernet cable through the chosen conduit entry hole, and connect it to the camera.




Side conduit entry



Back conduit entry


Step 12:

For the power and the alarm & audio I/O connectors, please refer to the User's manual for further details.

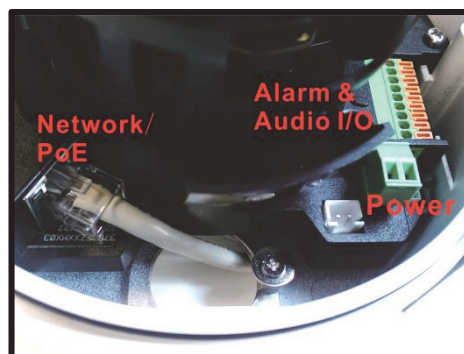

Step 13:


Adjust the pan / tilt / spin holders of the camera to point the lens at a suitable position for the desired camera view.

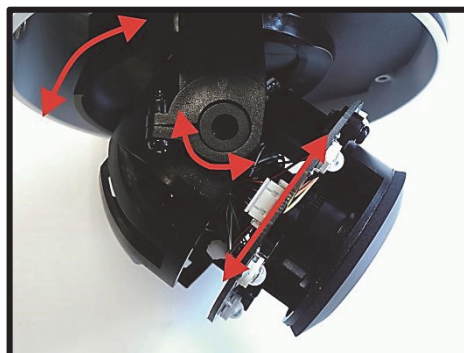


NOTE: Pan adjustment angle is nearly 360°, tilt angle is adjustable between 0° ~ 80°, and spin adjustment angle is between -100° ~ 100°.



NOTE: Users can see the camera view by accessing the camera Browser-viewer (refer to the User's manual for further details). Users can also check the camera view via connecting a BNC monitor. Refer to right figure for the (optional) BNC connector.

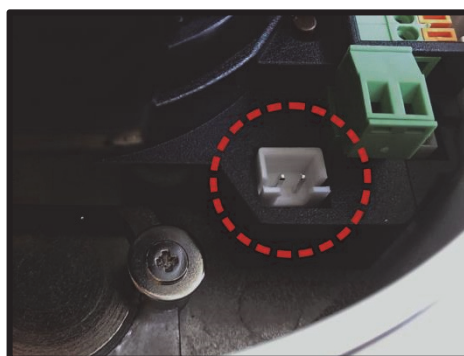**Step 14:**

Fasten the tilt screw as the right figure to fix the tilt angle of the camera.

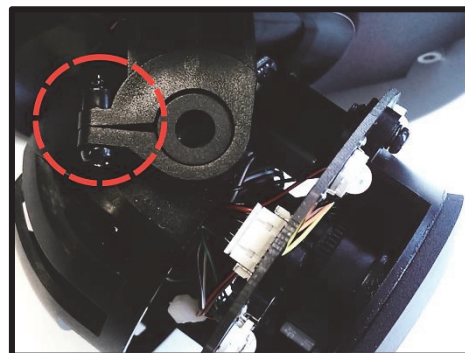
**Step 15:**

Attach the dome cover to the camera housing by fastening the anti-drop cable to the housing at the screw hole shown in the right figure. And then, tighten the two security screws indicated in the figure below with the supplied security torx to fix the dome cover.




Step 16:


Fix the Trim Ring to the T-bar Bracket to finish the installation.

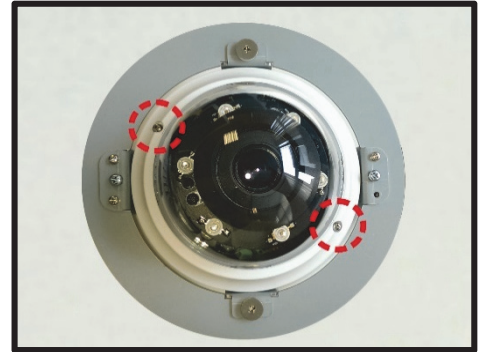

NOTE: There are two magnets on the back of the Trim Ring.

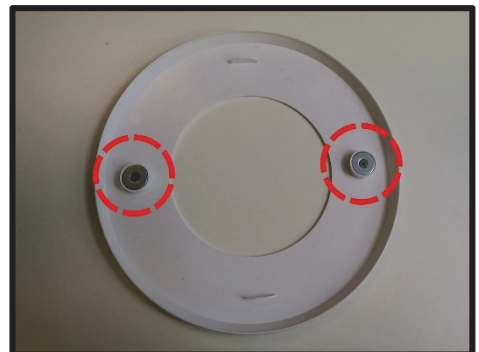

To attach the Trim Ring, just place it gently on the In-ceiling mount and adjust the position, like shown in this figure. Do not place the magnets on top of the screws.

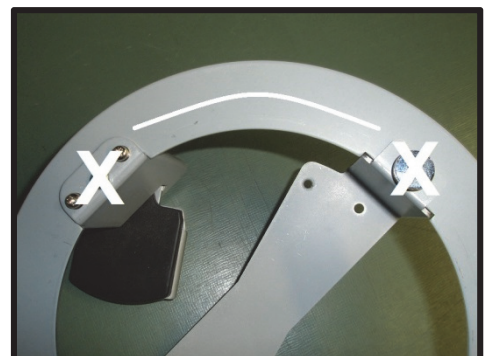

G-Cam/EBFC-005 (5.04736)_IA_EN 30.08.2017

Technical alterations reserved.

GEUTEBRÜCK GmbH

Im Nassen 7-9 | D-53578 Windhagen | Tel. +49 (0)2645 137-0 | Fax-999 E-mail: info@geutebrueck.com | Web: www.geutebrueck.com